

# Prosens Technology

**WT-8583S**

**New Value Wireless Mouse Sensor**



## Description

The Prosens Technology WT-8583S is a new low power, small form factor optical mouse sensor. It has a brand new low-power architecture and automatic power management modes, along with the second generation optical lens WT-8511, making it ideal for value and mass market wireless mice.

The WT-8583S is capable of high-speed motion detection - up to 20ips and 4G. In addition, it has an on-chip oscillator and LED driver to minimize external components.

The WT-8583S along with the WT-8511 3'rd generation trim lens, LED clip, and HLMP-ED80 LED form a complete and compact mouse tracking system. There are no moving parts and this translates to high reliability and less maintenance for the end user. In addition, precision optical alignment is not required, facilitating high volume assembly.

The sensor is programmed via registers through a four-wire serial port. It is housed in an 8-pin staggered dual in-line package (iDIP).

## Features

- ⦿ Low Power and the 3'rd Generation Optical Architecture
- ⦿ Small Form Factor
- ⦿ 'Smart' LED Current Switching depending on surface brightness
- ⦿ High Speed Motion Detection up to 20ips and 2G
- ⦿ External Interrupt Output for Motion Detection
- ⦿ Internal Oscillator - no clock input needed
- ⦿ Selectable Resolution up to 1000cpi
- ⦿ Operating Voltage: 2.6 - 3.3V
- ⦿ Two wire Serial Port Interface
- ⦿ Minimal number of passive components

## Applications

Value Wireless Optical Mice

## Theory of Operation

The WT-8583S is based on Optical Navigation Technology, which measures changes in position by optically acquiring sequential surface images (frames) and mathematically determining the direction and magnitude of movement.

The WT-8583S contains an Image Acquisition System (IAS), a Digital Signal Processor (DSP), and a four wire serial port.

The IAS acquires microscopic surface images via the lens and illumination system. These images are processed by the DSP to determine the direction and distance of motion. The DSP calculates the  $\Delta x$  and  $\Delta y$  relative displacement values.

An external microcontroller reads and translates the  $\Delta x$  and  $\Delta y$  information from the sensor serial port into PS2, USB, or RF signals before sending them to the host PC.

## Package Pinout


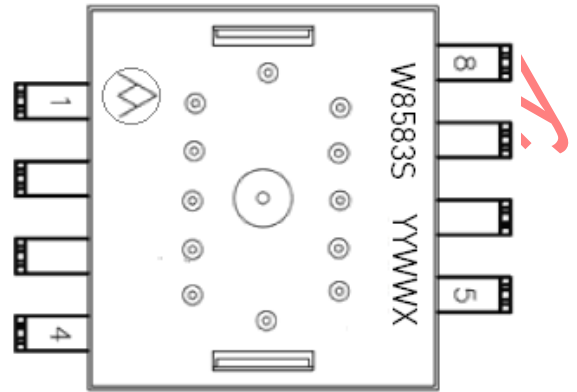


Figure1. Device Pinout

Pin	Name	Type	Description
1	NC	OUT	Reserve for test mode. Must be kept floating
2	Motion	I/O	Motion detection (active low)
3	SDIO	IN	SPI bi-directional data
4	SCLK	OUT	SPI clock
5	LED	GND	LED control
6	VSS	PWR	Chip ground
7	VDD	PWR	Power supply for I/O and internal output
8	RSVD	OUT	Reserve for test mode. Must connect through a 1uF capacitor to ground

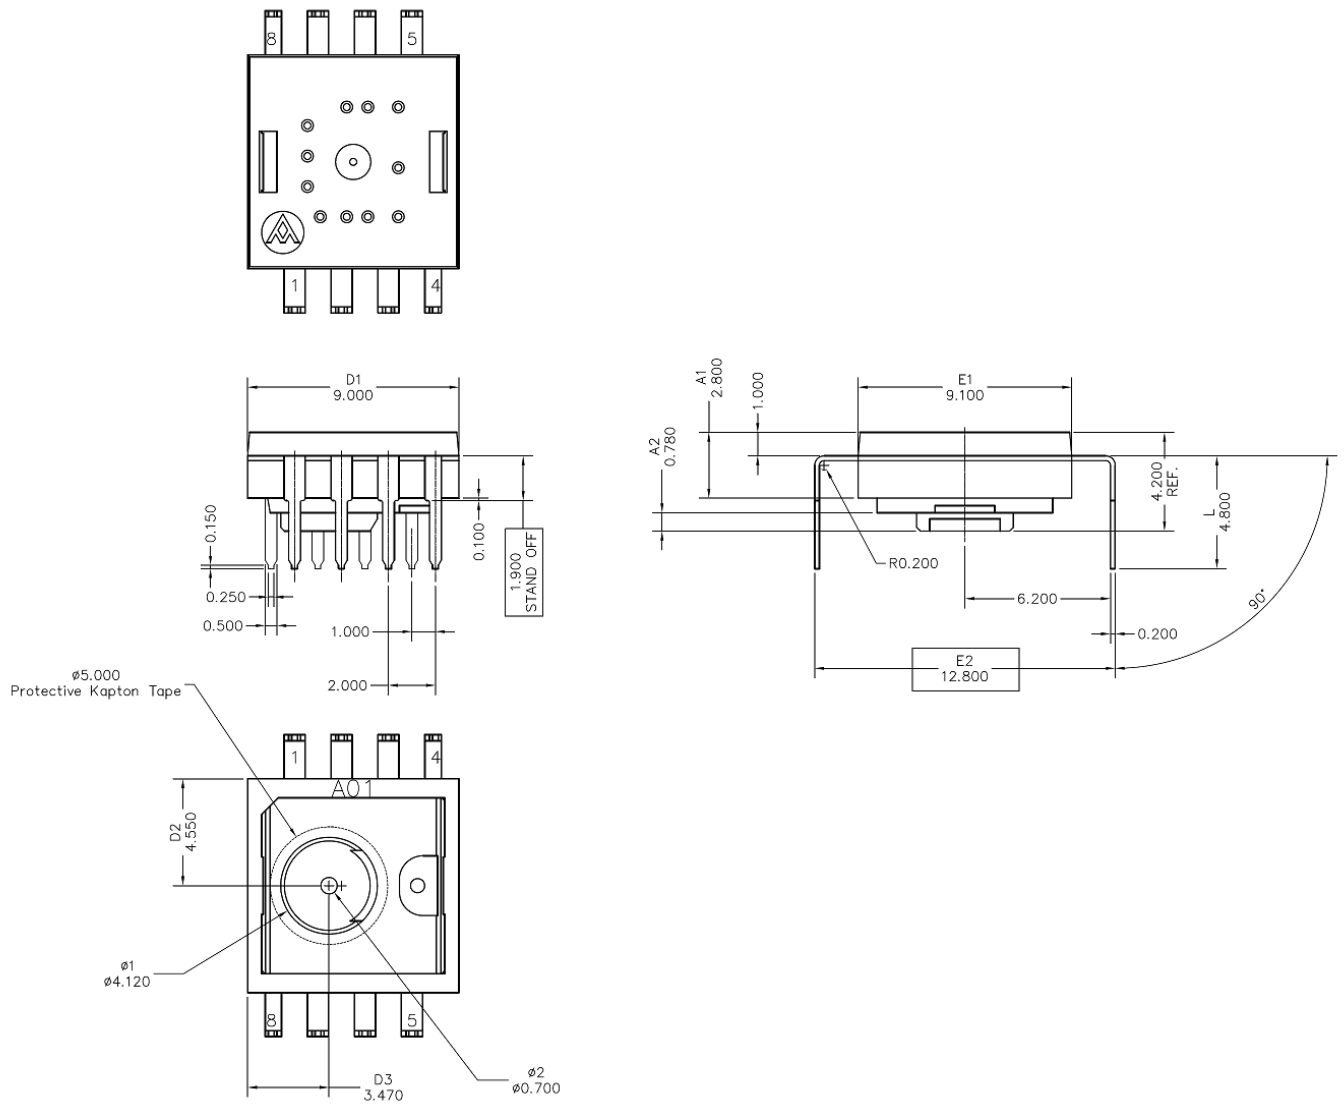

## Overview of Optical Mouse Sensor Assembly

Prosens Technology provides an IGES file drawing describing the base plate molding features for lens and PCB alignment. The WT-8583S sensor is designed for mounting on a through-hole PCB. There is an aperture stop and features on the package that align to the lens. The WT-8511 lens provides optics for the imaging of the surface as well as the illumination of the surface at the optimum angle. Features on the lens align it to the sensor, base plate, and clip with the LED. The clip holds the LED in relation to the lens. The LED must be inserted into the clip and the LED leads formed prior to loading on the PCB.

The HLMP-EG3E LED is recommended for illumination.



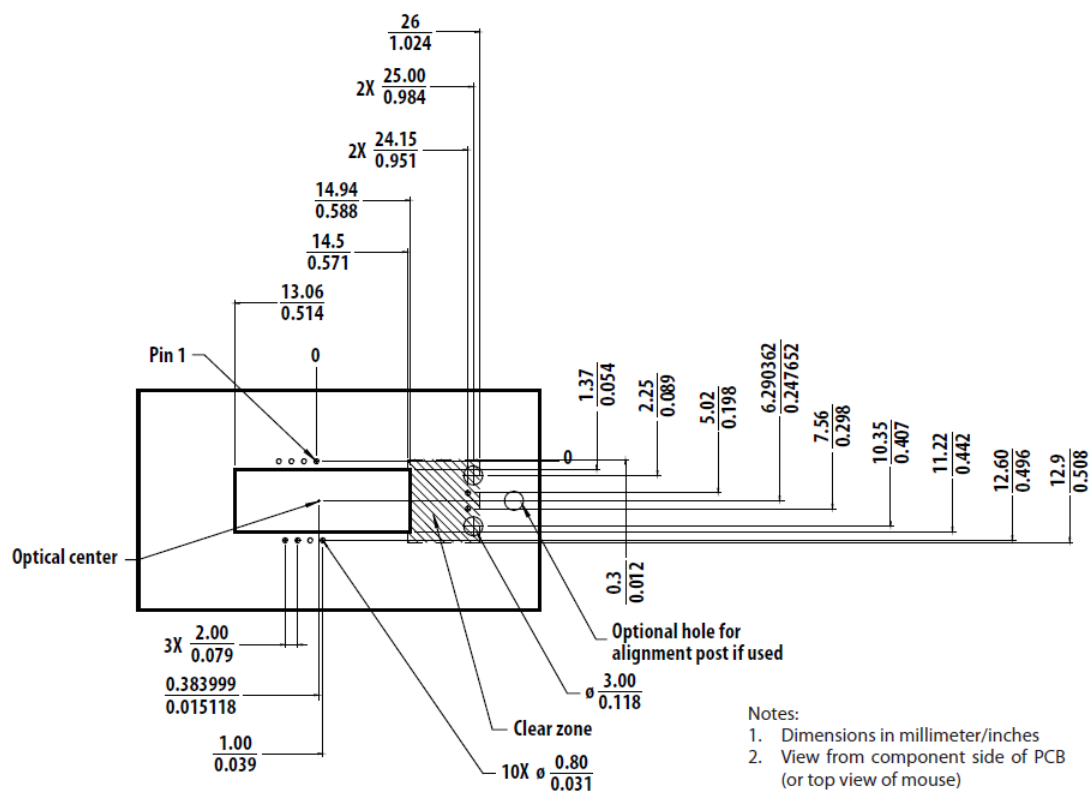


Figure3. Recommended PCB Mechanical Cutouts and Spacing

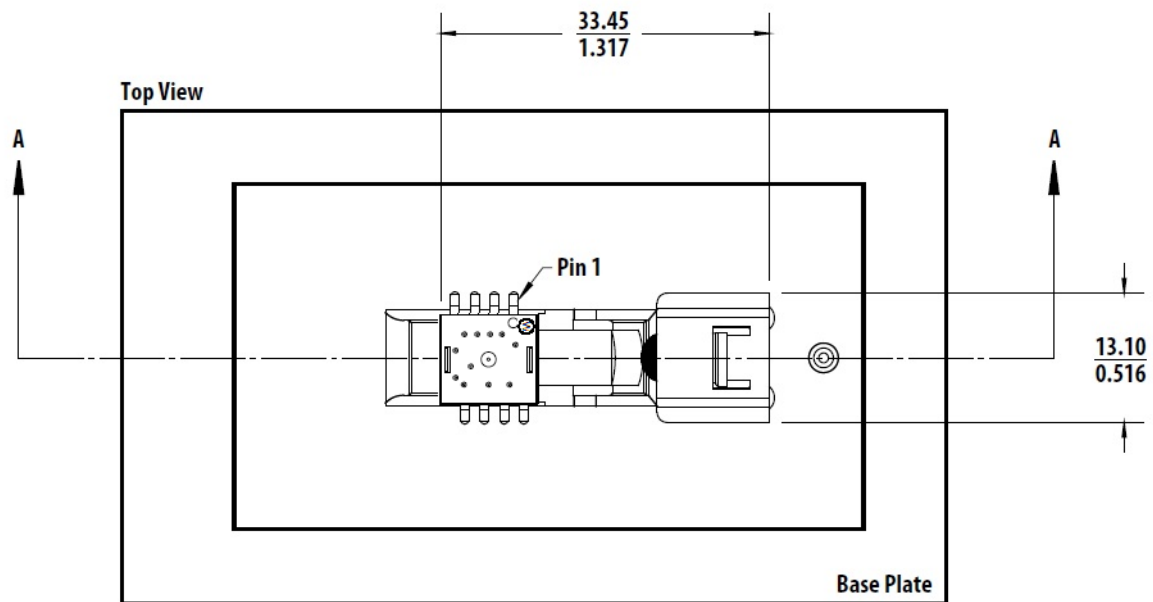


#### CROSS SECTION SIDEVIEW

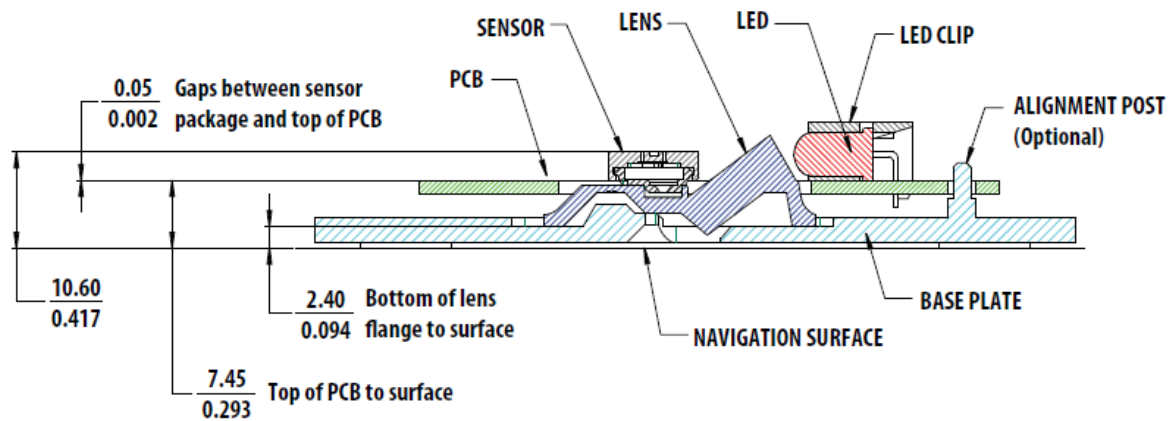

NOTE: Dimensions in mm/Inches

Important Note: Pin 1 of sensor should be located nearest to the LED

**Figure4. 2D Assembly Drawing of Sensor (Top and Side View)**

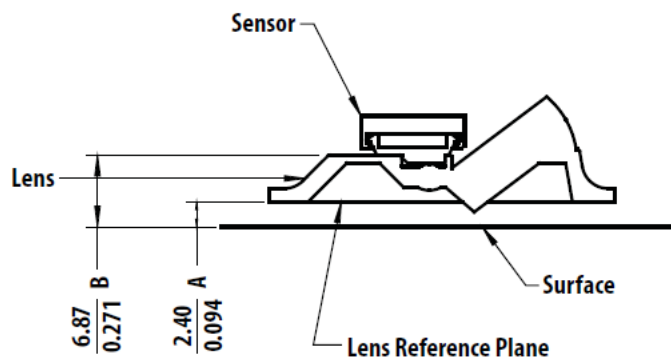


Note:

A – Distance from object surface to lens reference plane

B – Distance from object surface to sensor reference plane

**Figure5. Distance from Lens Reference Plane to Tracking Surface (Z)**

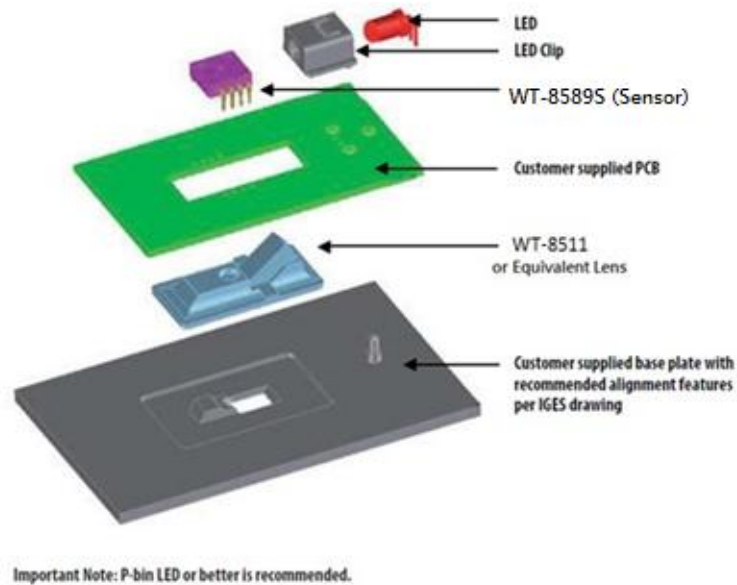

**Figure6. Exploded View of Assembly**

## PCB Assembly Considerations

1. Insert the sensor and all other electrical components into PCB.
2. Insert the LED into the assembly clip and bend the leads 90 degrees.
3. Insert the LED clip assembly into PCB.
4. Wave solder the entire assembly in a no-wash solder process utilizing solder fixture. The solder fixture is needed to protect the sensor during the solder process. It also sets the correct sensor-to-PCB distance as the lead shoulders do not normally rest on the PCB surface. The fixture should be designed to expose the sensor leads to solder while shielding the optical aperture from direct solder contact.
5. Place the lens onto the base plate.
6. Remove the protective Kapton tape from optical aperture of the sensor.

Care must be taken to keep contaminants from entering the aperture. Recommend not to place the PCB facing up during the entire mouse assembly process. Recommend to hold the PCB first vertically for the Kapton removal process.

7. Insert PCB assembly over the lens onto the base plate aligning post to retain PCB assembly. The sensor aperture ring should self-align to the lens.

8. The optical position reference for the PCB is set by the base plate and lens. Note that the PCB motion due to button presses must be minimized to maintain optical alignment.

9. Install mouse top case. There MUST be a feature in the top case to press down onto the PCB assembly to ensure all components are interlocked to the correct vertical height.

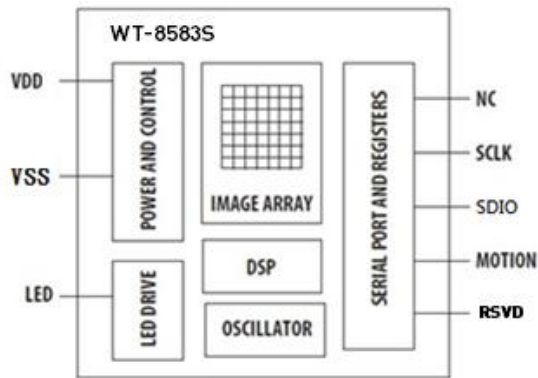


Figure7. Block diagram of WT-8583S optical mouse

## Design considerations for improving ESD Performance

The table below shows typical values assuming base plate construction per the Prosens Technology supplied IGES file and WT-8511 trim lens. Stand-off of the base plate shall not be larger than 5 mm.

Typical Value	Distance (mm)
Creepage	15.43 mm
Clearance	7.77 mm

Note that the lens material is polycarbonate or polystyrene HH30, therefore, cyanoacrylate based adhesives should not be used as they will cause lens material deformation

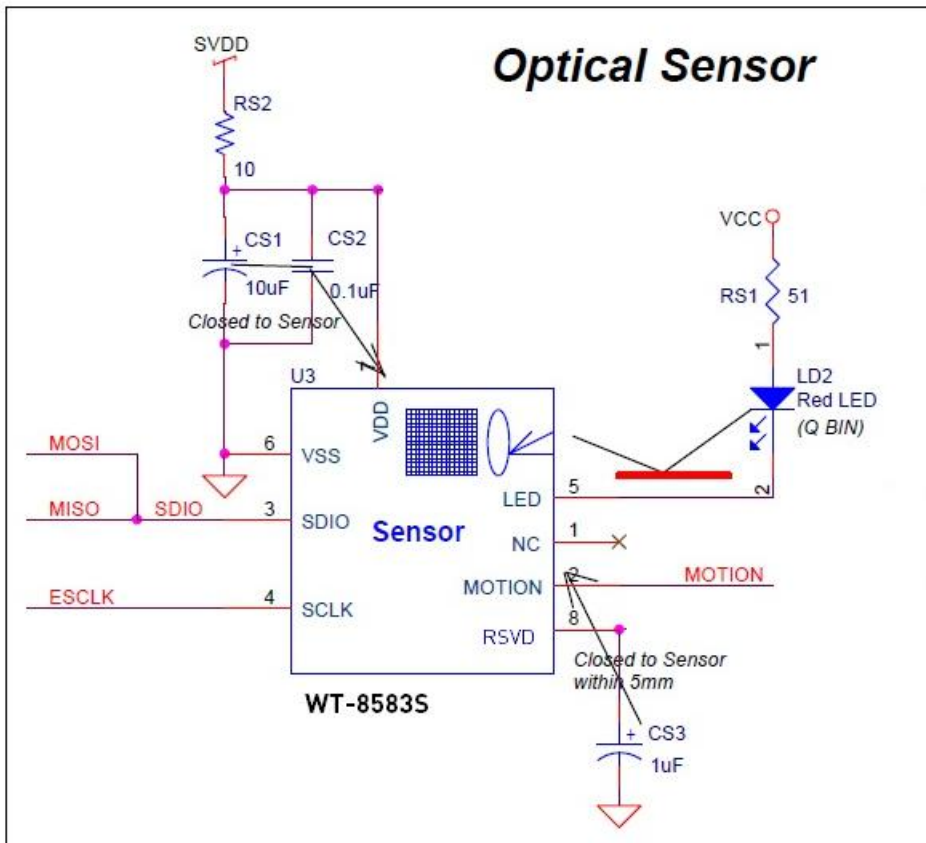


Figure 8. Sensor Circuitry

## Regulatory Requirements

- ⦿ Passes FCC B and worldwide analogous emission limits when assembled into a mouse with shielded cable and following Prosens Technology recommendations.
- ⦿ Passes EN61000-4-4/IEC801-4 EFT tests when assembled into a mouse with shielded cable and following Prosens Technology recommendations.
- ⦿ UL flammability level UL94 V-0.




## Electrical Specifications and Characteristics

### Absolute Maximum Rating

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Storage Temperature	$T_{STR}$	-40	-	85	°C	
Operating Temperature	$T_{opt}$	-15		55	°C	
Voltage Rating on Input	$V_{IN}$	-0.3	-	$V_{DD}+0.3$	V	
Voltage Rating on VDD		-0.3	-	3.3	V	
ESD				2	KV	

### Recommended Operating Conditions

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Operating Supply Voltage	$V_{supply}$	2.6	3.0	3.3	V	
Operating Temperature	$T_{opt}$	0		40	°C	
Supply Noise	$V_{NOISE}$			100	mV	
Resolution	R	400		1000	CPI	
Serial Port Clock Frequency	$F_{SCK}$			3	MHz	
Frame Rate	FR			2400	FPS	
Speed	Speed			20	IPS	
Acceleration	A			2	G	At the normal mode and 2400 fps.

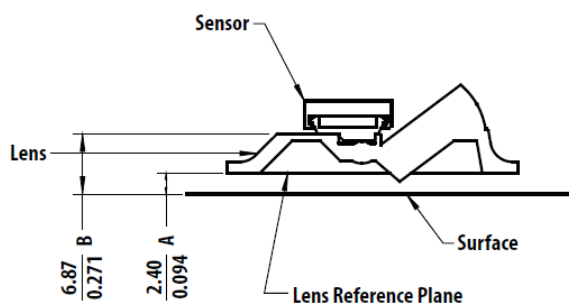

Note:

A – Distance from object surface to lens reference plane

B – Distance from object surface to sensor reference plane

Figure9. Distance from Lens Reference Plane to Tracking Surface (Z)

## AC Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Power up time	$T_{\text{pup}}$	40	50	60	ms	
SPI re-sync. low level time	$T_{\text{RSYNCL}}$	1			us	
SPI re-sync. time	$T_{\text{RSYNC}}$	1.7			ms	

## DC Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Supply current at normal mode	$I_{\text{nor}}$		4		mA	VDD = 3.0V T = 25 degree
Supply current at sleep 1 mode	$I_{\text{slp1}}$		200		uA	VDD = 3.0V T = 25 degree
Supply current at sleep 2 mode	$I_{\text{slp2}}$		60		uA	VDD = 3.0V T = 25 degree
Supply current at power down mode	$I_{\text{pd}}$		10		uA	VDD = 3.0V T = 25 degree
Type: MOTION, SCLK, SDIO						
Input Voltage High	$V_{\text{IH}}$	2.0			V	VDD = 3.0V
Input Voltage Low	$V_{\text{IL}}$			0.8	V	VDD = 3.0V
Output Voltage High	$V_{\text{OH}}$	2.4			V	VDD = 3.0V $I_{\text{OH}} = 2\text{mA}$
Output Voltage Low	$V_{\text{OL}}$			0.4	V	VDD = 3.0V $I_{\text{OL}} = 2\text{mA}$
Type: LED						
Output Voltage Low	$V_{\text{OL-LED}}$			380	mV	VDD = 3.0V $I_{\text{OL}} = 25\text{mA}$

## Serial Peripheral Interface (SPI)

The serial peripheral interface is used by an external controller to read/write the register blocks and OPMS registers inside WT-8583S.

### SCLK (Serial Clock)


This serial clock line is always generated by the external controller.

### SDIO (Serial Data)

The serial data line is used by the external controller to read and write data.

### Write Operation


Write operation, data going from the external controller to WT-8583S, is always initiated by the external controller and consists of two-byte message blocks. The first byte of a message block contains the address (7 bits) and has a '1' as its MSB to indicate data direction. The second byte contains the data to be written. The SDIO data transfer is synchronized by SCLK. The external controller changes SDIO on falling edges of SCLK. The WT-8583S reads SDIO on rising edges of SCLK. The write operation protocol is illustrated in **Figure. 10.**

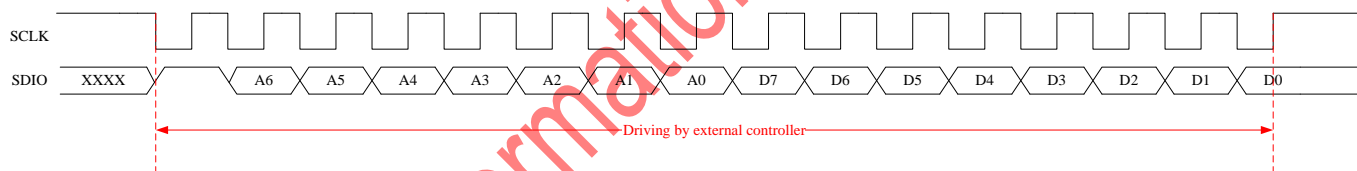

**Figure. 10 SPI Write Operation**

### Read Operation


Read operation, data going from WT-8583S to the external controller, is always initiated by the external controller and consists of two-byte message blocks. The first byte of a message block contains the address written by the external controller and has a '0' as its MSB to indicate data direction. The second byte contains the data and is driven by WT-8583S. The SDIO data transfer is synchronized by SCLK and SDIO is changed by WT-8583S on falling edges of SCLK. The external controller reads SDIO data on every rising edge of SCLK. The SDIO pin of the External Controller must go to a high Z state after the last address bit (A0) has been sent by the external controller. And the SDIO pin of WT-8583S will go to high Z state after the last data bit has been output. The read operation protocol is illustrated in **Figure. .**

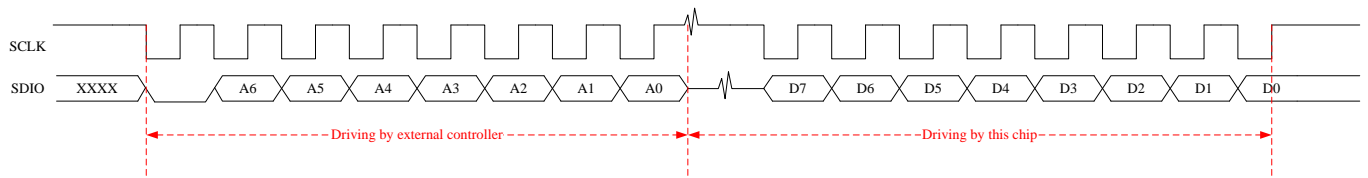

**Figure. 11 SPI Read Operation**

## Re-synchronization

If the external controller and the WT-8583S are out of synchronization, the data access from/to the registers will be incorrect. In such a case, the external controller drives the SCLK to '0' for at least  $T_{RSYNCL}$  time period, and then drives the SCLK to '1' for at least  $T_{RSYNC} - T_{RSYNCL}$  time period to get WT-8583S synchronized with the external controller.

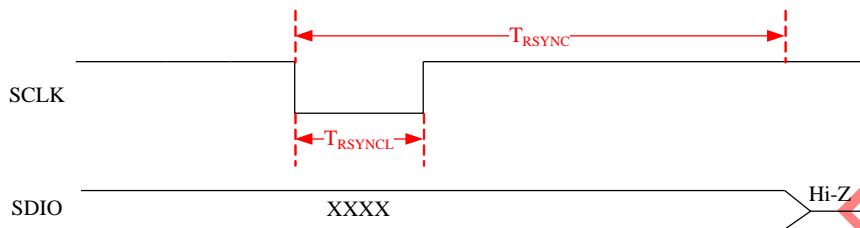

**Figure 12. Re-synchronization Operation**

## Registers

### PIDL: Product ID Low Byte (\$0000h)

Bit	Default	R/W	Name	Description
B7: 0	30h	R	PIDL	Product identifier low byte. It can be read across serial communication interface to check if the link is OK.

### PIDH: Product ID High Byte (\$0001h)

Bit	Default	R/W	Name	Description
B7: 0	50h	R	PIDH	Product identifier high byte. It can be read across serial communication interface to check if the link is OK.

### M\_Status: Motion Status (\$0002h)

Bit	Default	R/W	Name	Description
B7	0	R	MOTION	Motion flag since last report: <sup>note1</sup> 0: No motion 1: Motion occurred
B6	0	R		Reserved
B5	0	R		Reserved
B4	0	R	DYOVF	Motion at Y direction overflow flag: <sup>note1</sup> 0: No overflow 1: Overflow has occurred
B3	0	R	DXOVF	Motion at X direction overflow flag: <sup>note1</sup> 0: No overflow 1: Overflow has occurred
B2	1	R	R_MIR[2]	Resolution in count per inch. The data is copied from the B2:0 of Config register (\$0006h).
B1	0	R	R_MIR[1]	
B0	0	R	R_MIR[0]	

Note1: When both Delta\_X and Delta\_Y are overflowed with value to be -128 (0x80), only DXOVF and DYOVF is set. The Motion pin/register is not active.

### Delta\_X: X movement (\$0003h)

Bit	Default	R/W	Name	Description
B7: 0	00h	R	Delta_X	X movement since last report. Reading this register will also clear its content. The movement report range is from -128 to 127. If the total movement is 0

**Delta\_Y: Y movement (\$0004h)**

Bit	Default	R/W	Name	Description
B7: 0	00h	R	Delta_Y	Y movement since last report.  Reading this register will also clear its content. The movement report range is from -128 to 127. If the total movement is overflowed, DYOVF becomes 1.

**Op\_Mode: Operation Mode (\$0005h)**

Bit	Default	R/W	Name	Description
B7	1	A	LEDsht_En	LED shutter enable: 0: Disable 1: Enable
B6	0	R		Reserved
B5	1	R		Reserved
B4	1	A	Slp_En	Sleep mode enable: 0: Disable 1: Enable
B3	1	A	Slp2_En	Sleep mode 2 enable: 0: Disable 1: Enable
B2	0	A	Slp2_Mu	Enter sleep mode 2 manually.
B1	0	A	Slp1_Mu	Enter sleep mode 1 manually.
B0	0	A	Wakeup	Wake up from sleep mode manually.

**Config: Configuration (\$0006h)**

Bit	Default	R/W	Name	Description
B7	0	A	M_RST	Manual reset for whole chip: 0: Disable 1: Enable
B6	0	A	Mot_OSel	MOTION pin output function select.  0: Level sensitive. If MOTION pin is at low level, it means that Delta_X and/or Delta_Y register has data. The mouse controller can read M_Status, Delta_X and Delta_Y sequentially to get the motion result. After the Delta_X/Delta_Y registers have been read, Delta_X/Delta_Y registers will be cleared (zero) and the level of MOTION pin will become high.  1: Edge sensitive. If there is motion being detected, MOTION p

				in will generate one low pulse to inform the mouse controller .
B5	0	R		Reserved
B4	0	R		Reserved
B3	0	A	PD_En	Power down mode enable 0: Disable 1: Enable
B2	1	A	RES[2]	Output resolution setting. 000: 400 001: 500 010: 600 011: 800 100: 1000 101: Reseved 110: Reserved 111: Reserved
B1	0	A	RES[1]	
B0	0	A	RES[0]	

#### Img\_Qua: Image Quality (\$0007h)

Bit	Default	R/W	Name	Description
B7: 0	00h	R	Img_Qua	Image Quality register indicates the quality level of the captured images.


#### Op\_State: Operation State (\$0008h)

Bit	Default	R/W	Name	Description
B7	0	R		Reserved
B6	0	R		Reserved
B5	0	R		Reserved
B4	0	R		Reserved
B3	0	R	Slp_St	Sleep state. This bit is e 0: Sleep timer is at sleep1 state 1: Sleep timer is at sleep 2 state
B2	0	R	Op_St[2]	Operating state of the WT-8583D 000: Normal Mode 001: Entry sleep 1 processing 100: Sleep mode (See Slp_St for more information) Others: Reserved for future use
B1	0	R	Op_St[1]	
B0	0	R	Op_St[0]	

Preliminary Information for Reference Only



## Sensor Motion Detection Flow Chart

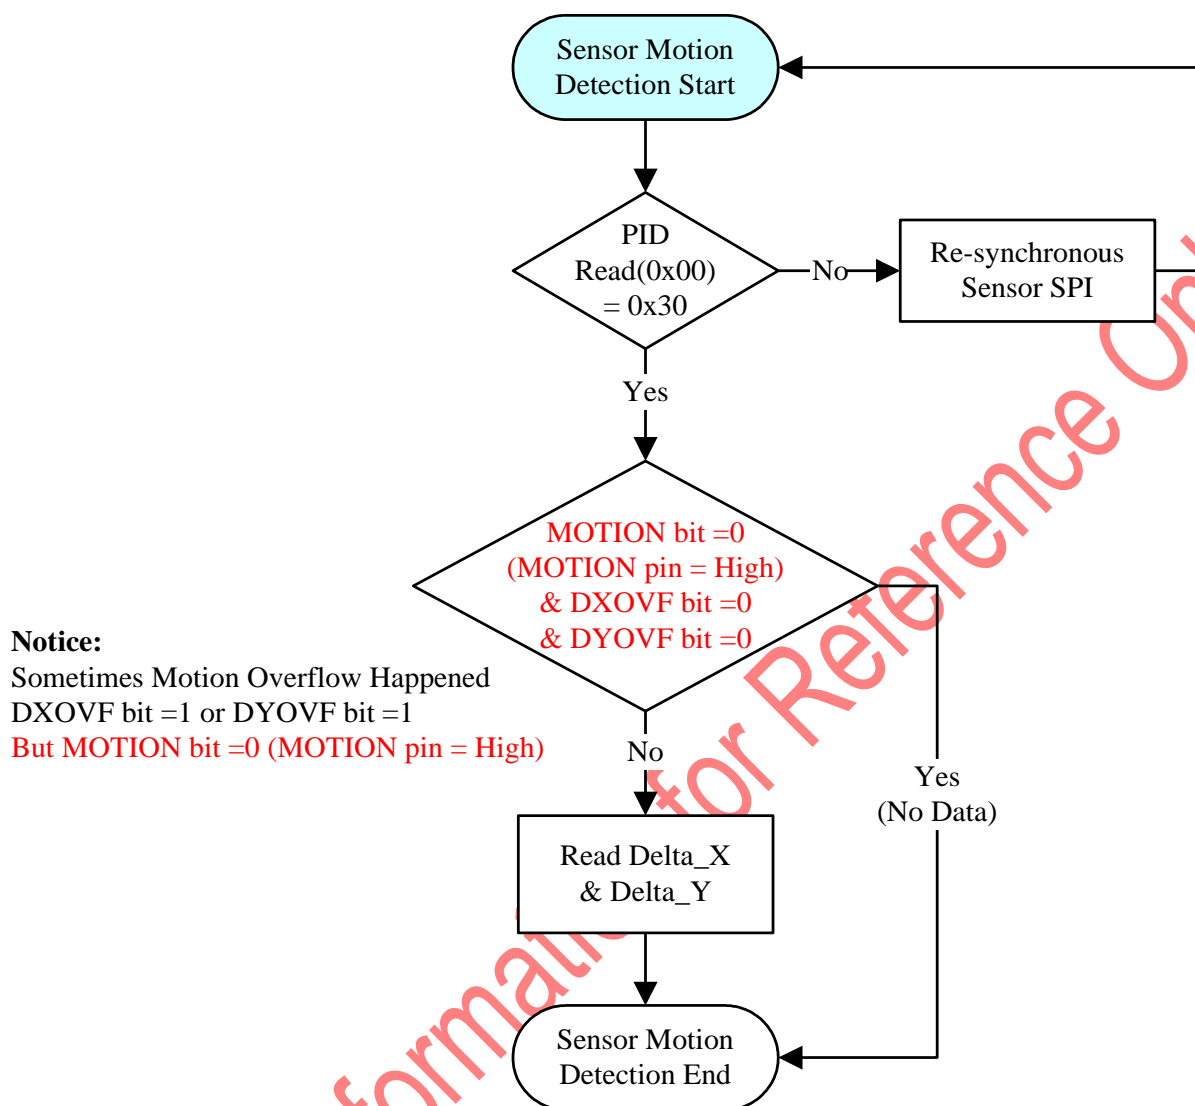

Prosens Technology and the logo are trademarks of Prosens Technology in Taiwan, Republic of China, and other countries. Data is subjected to be changed. All rights reserved.

