



深圳市晶峰达电子科技有限公司
 东莞市琪芯电子有限公司

电话:13798528768, 0755-29206918, FAX:81703081
 邮箱:info@jfd-ic.com, QQ:402431824 阿里旺旺:szjfdz
 网址:www.jfd-ic.com MSN:aleafuyzf@hotmail.com

DL8072

RoHS


SUPER-REGENERATION RECEIVER MODULE

315/434 MHz ASK RECEIVER

Description

DL8072 is an ASK receiver module. The DL8072 is based on a single-conversion ,super-regeneration receiver architecture .It can use in OOK / HCS / PWM modulation signal and demodulate to digital signal. MO-RXLC-A had a high performance and easily to design your product.

It can be used on wireless security system or specific remote-control function and others wireless system

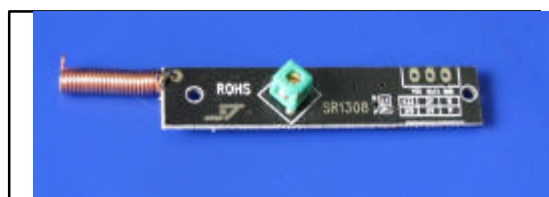

Features

- Low power consumption.
- Long receiver range. Up to 200M.
- Easy for application.
- Operation temperature range : ? 20 ~ + 80
- Available Operation voltage : 5 Volts./ 3Volts.
- Available frequency at : 315/434 MHz

Applications

- Car security system
- Remote keyless entry
- Garage door controller
- Home security
- Wireless mouse
- Automation system
- Wireless temp/humidity weather station clock
- Door bell

Product Identification

315MHz	DL8072-BS315M
433.92MHz	DL8072-BS434M




Absolute Maximum Ratings


Parameter	Rating	Units
Supply Voltage	3.0	V DC
Operating Temperature	-20~+80	

Absolute Maximum Ratings

Parameter	Symbol	Condition	Specification			Unit
			Min.	Typical	Max.	
Operation Voltage			2.6	3	3.6	V
Sensitivity	Psens	Vcc=3.0V, 1Kbps Data Rate	315MHz	-98	--102	dBm
			434MHz	--98	--102	dBm
ASK out logic HIGH	VOH	Iload = 30μA	0.7*V _c c			V DC
ASK out logic LOW	VOL	Iload = 30μA			0.3*vcc	V DC
Supply current	Icc			1.0	2.0	mA
Tune on Time	Ton	Data start out by Vcc turn on		25		ms
Data Rate			300	1k	6k	bps
Output duty		Vcc=3V; 1kbps data rate	40		60	%

Pin Dimension(unit:mm)

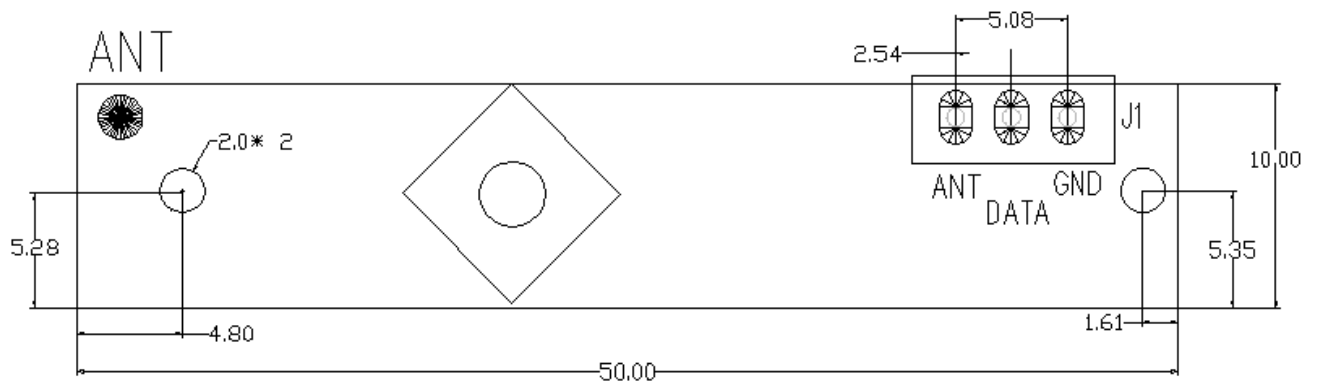

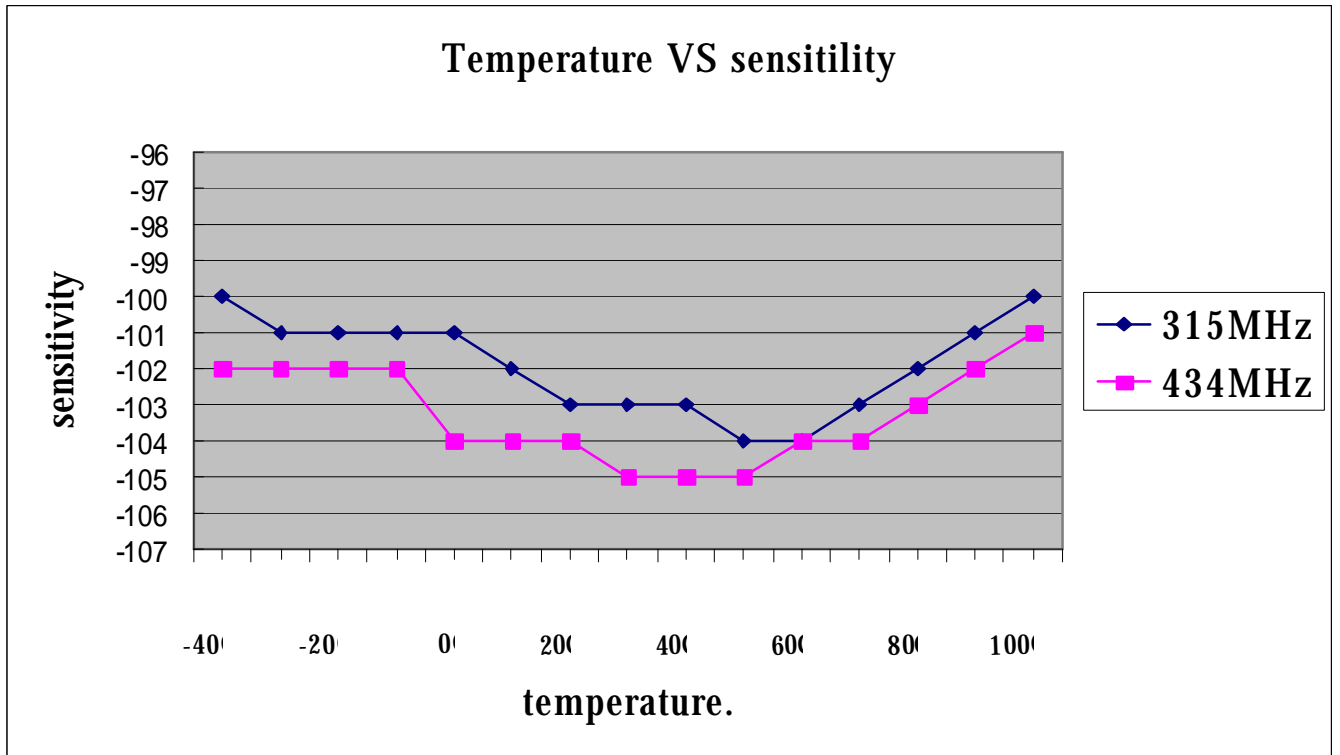



深圳市晶峰达电子科技有限公司
东莞市琪芯电子有限公司

电话: 13798528768, 0755-29206918, FAX: 81703081
邮箱: info@jfd-ic.com, QQ: 402431824 阿里旺旺: szjfdz
网址: www.jfd-ic.com MSN: aleafuyzf@hotmail.com

Appication

antenna

Mark:

1. Antenna length about :23cm for 315MHz
17cm for 434mHz