

FEATURE :

1.5V OPERATE

VERY LOW POWER CONSUMPTION

1 CURRENCIES : 1 RATES PRESET & RATE CHANGEABLE.


AUTO DETECT THE EURO RATE.

AUTOMATICAL POWER OFF

"EURO" AMOUNT IS FIXED TO 2 DEC.PT. ROUND UP.

Special Option for ITL, Pte, Esp, Grd ,Bef at 2 DEC.PT. ROUND UP.

KEYBOARD

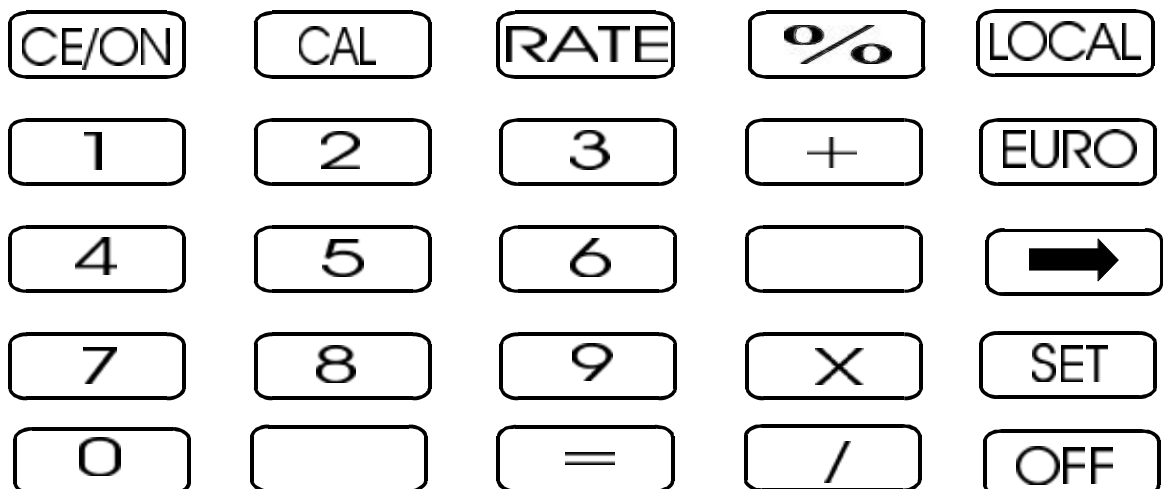



"CE/ON"

EURD	0.00
LOCAL	0.

"RATE"

EURD	SET	1.00
LOCAL		1.

"6.64168"

EURD	6.64
LOCAL	6.64168

"SET"

EURD	SET	1.00
LOCAL		6.64168

"1"

EURD	0.15
LOCAL	1.

"1"

EURD	1.66
LOCAL	11.

"+"

EURD	
LOCAL	11.

"5"

EURD	
LOCAL	5.

"="

EURD	2.41
LOCAL	16.00

÷

EURD	
LOCAL	16.

"11"

EURD	
LOCAL	11.



DL5552 INPUT KEYS

LCD

"="

EURO	0.22
LOCAL	1.45

"+"

EURO	
LOCAL	1.4545454

"1"

EURO	
LOCAL	1.

"="

EURO	0.37
LOCAL	2.45

"EURO"

LOCAL	2.45
EURO	0.37

"+"

LOCAL	
EURO	0.3695669

"2"

LOCAL	
EURO	2.

"="

LOCAL	15.74
EURO	2.37

"LOCAL"

EURO	2.37
LOCAL	15.74

➔


EURO	2.36
LOCAL	15.7

➔

EURO	2.26
LOCAL	15.

"CAL"

CAL	
	0.

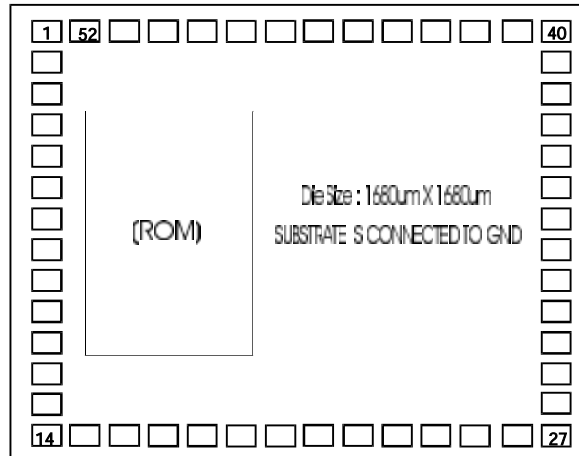

PIN ASSIGNMENT


NO	Name	X	Y	NO	Name	X	Y
1	NC	77 5	1602 5	27	SEG10	1602 5	77 5
2	XN	77 5	1472 5	28	SEG11	1602 5	207 5
3	XOUT	77 5	1357 5	29	SEG12	1602 5	322 5
4	GND	77 5	1242 5	30	SEG13	1602 5	437 5
5	VDD1	77 5	1127 5	31	SEG14	1602 5	552 5
6	VDD2	77 5	1012 5	32	SEG15	1602 5	667 5
7	VDD3	77 5	897 5	33	SEG16	1602 5	782 5
8	CUP1	77 5	782 5	34	SEG17	1602 5	897 5
9	CUP2	77 5	667 5	35	SEG18	1602 5	1012 5
10	COM1	77 5	552 5	36	SEG19	1602 5	1127 5
11	COM2	77 5	437 5	37	SEG20	1602 5	1242 5
12	COM3	77 5	322 5	38	SEG21	1602 5	1357 5
13	COM4	77 5	207 5	39	SEG22	1602 5	1472 5
14	COM5	77 5	77 5	40	SEG23	1602 5	1602 5
15	KO1	207 5	77 5	41	SEG24	1472 5	1602 5
16	KO2	322 5	77 5	42	SEG25	1357 5	1602 5
17	KO3	437 5	77 5	43	SEG26	1242 5	1602 5
18	SEG1	552 5	77 5	44	SEG27	1127 5	1602 5
19	SEG2	667 5	77 5	45	K0	1012 5	1602 5
20	SEG3	782 5	77 5	46	K1	897 5	1602 5
21	SEG4	897 5	77 5	47	K2	782 5	1602 5
22	SEG5	1012 5	77 5	48	K3	667 5	1602 5
23	SEG6	1127 5	77 5	49	K4	552 5	1602 5
24	SEG7	1242 5	77 5	50	RESET	437 5	1602 5
25	SEG8	1357 5	77 5	51	OPT	322 5	1602 5
26	SEG9	1472 5	77 5	52	TEST	207 5	1602 5



深圳市晶峰达电子科技有限公司

东莞市琪芯电子有限公司


电话: 13798528768, 0755-29206918, FAX: 81703081
邮箱: info@jfd-ic.com, QQ: 402431824 阿里旺旺: szjfdz
网址: www.jfd-ic.com MSN: aleafuyzf@hotmail.com

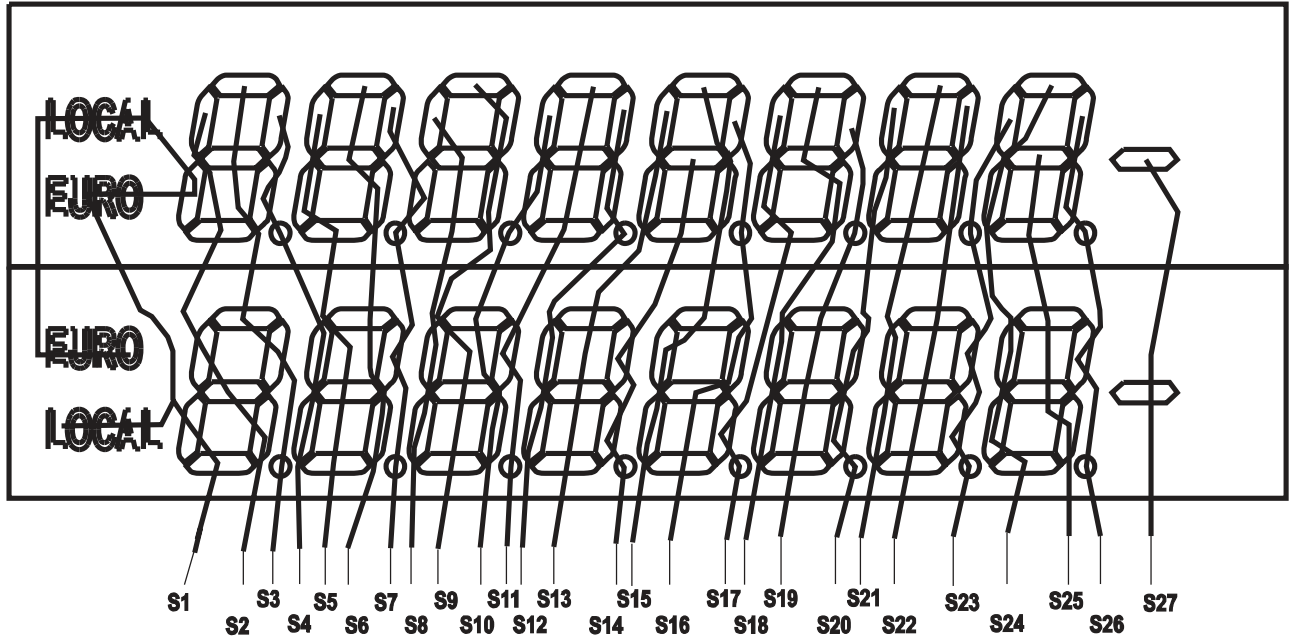

VLCD : 4.5v

1/5 Duty


1/3 Bias

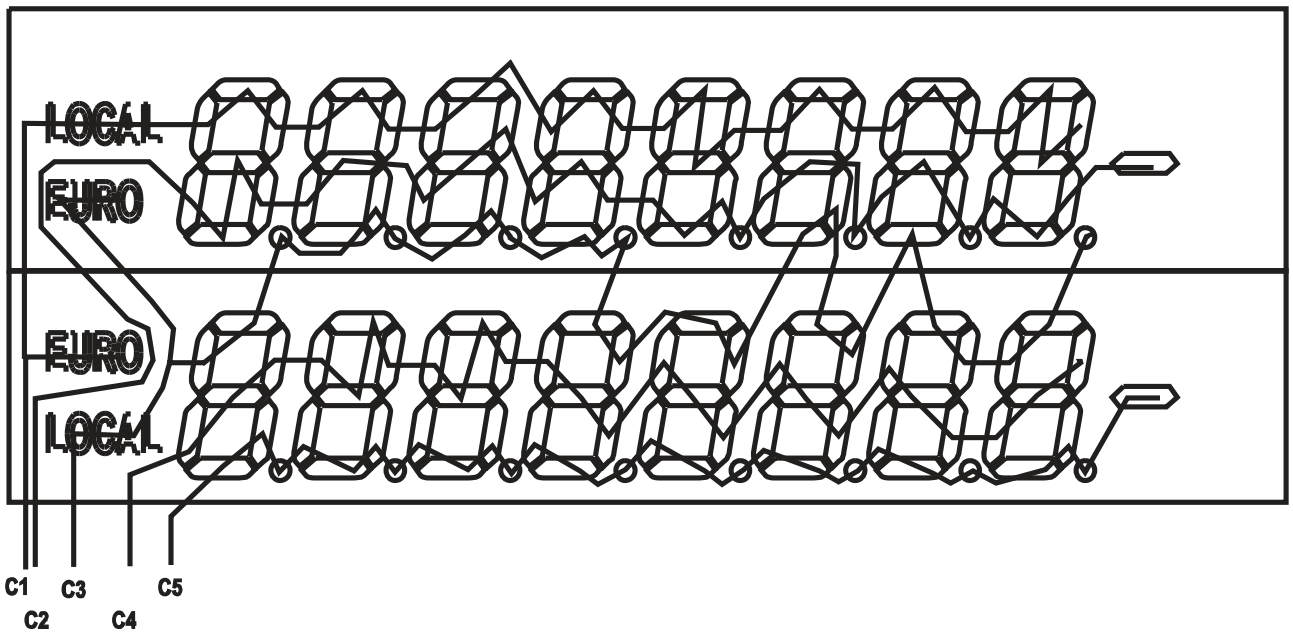

BANK 1 -- AUTO	BANK 2 -- AUTO	BANK 3 -- 2 d.p.
JP1 - FRF	JP1 - ITL	JP1 - ITL
JP2 - DEM	JP2 - NLG	JP2 - NLG
JP3 - BEF/LUF	JP3 - PTE	JP3 - PTE
JP4 - ATS	JP4 - ESP	JP4 - ESP
JP5 - FIM	JP5 - SIT	JP5 - SIT
JP6 - IEP	JP6 - 1	JP6 - BEF/LUF

JPA-CLOSED,JPB-OPEN.....BANK1
 JPA-OPEN,JPB-CLOSED.....BANK2
 JPA-OPEN,JPB-OPEN.....BANK3

AUTO:
 For Rate >= 40, 0 dec.pt.

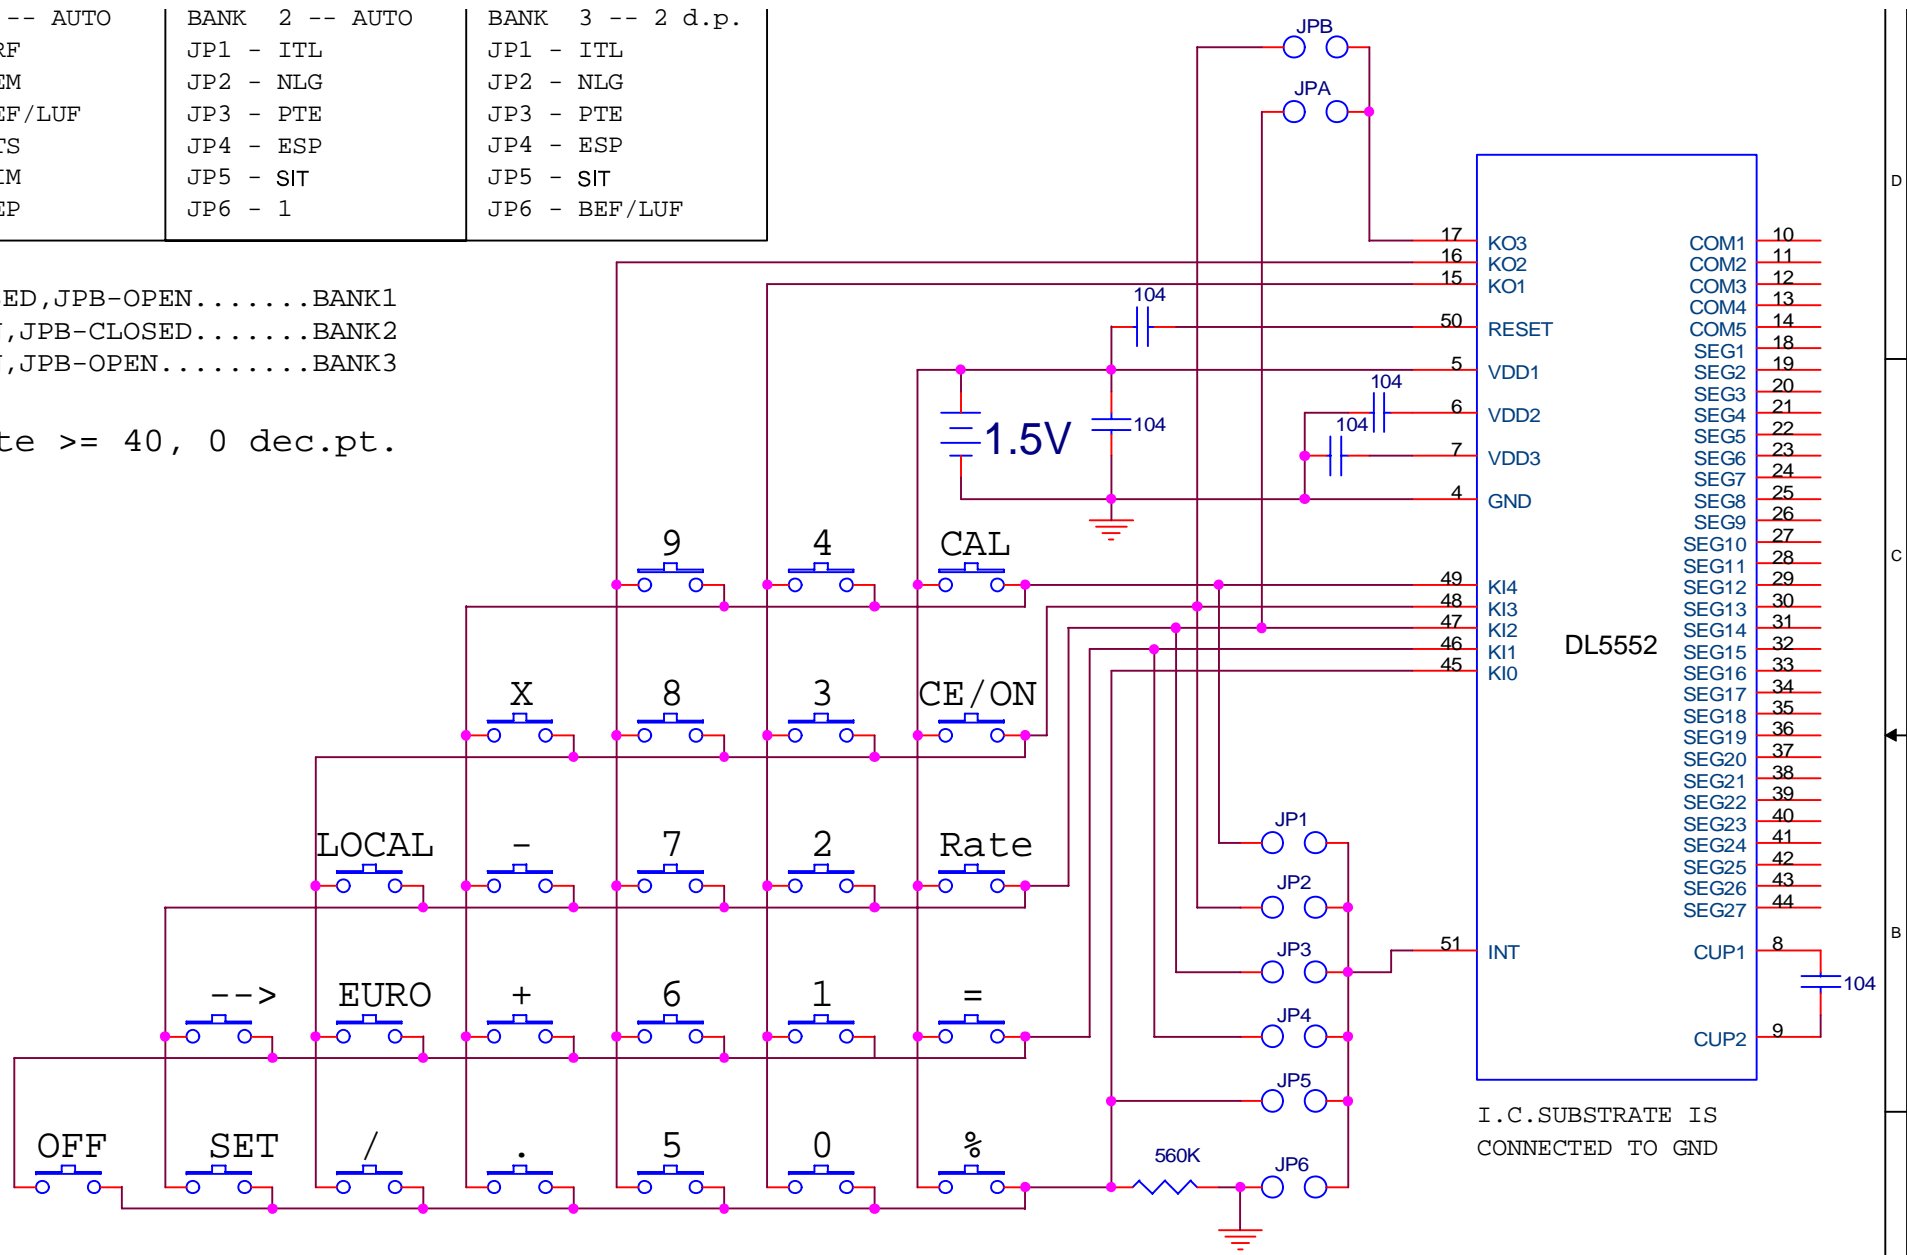

Title		
DL5552		
Size	Document Number	Rev
A	DL5552	
Date:	Saturday, December 29, 2001	Sheet 1 of 1